


STARLINE SINGLE-SECTION STRAIGHT LADDER

Class	Household
Use frequency	Regular
Use	Flat surface
Main material	Aluminium
Maximum load (kg)	150
Guarantee (year)	3
Standard	EN 131
Decree	96-333
Recyclable up to (%)	93

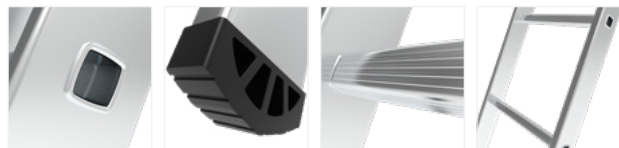

STARLINE SINGLE-SECTION STRAIGHT LADDER

Reference		 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (mm)	 (kg)	
00110708	8	2.25	2.25	3.15	2.13	0.82	0.06	0.34	0.34	53	2.8	3178740265168
00110709	9	2.53	2.53	3.43	2.39	0.91	0.06	0.34	0.34	53	3.2	3178740265175
00110710	10	2.81	2.81	3.71	2.65	1.02	0.63	0.34	0.34	61	4	3178740265182

	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (mm)	 (kg)	
Number of rungs / steps	Max. overall product height (m)	Max. height of deployed product (m)	Max. access height (m)	Recommended positioning height (m)	Recommended wall distance (m)	Thickness of folded product (m)	Product width without stabilisers (m)	Product width with stabiliser bar (m)	Upright section (mm)	Weight (kg)	Barcode