



STARLINE TWO-SECTION COMBINATION LADDER

Class	Household
Use frequency	Regular
Use	Flat surface
Main material	Aluminium
Maximum load (kg)	150
Guarantee (year)	3
Standard	EN 131
Decree	96-333
Recyclable up to (%)	93

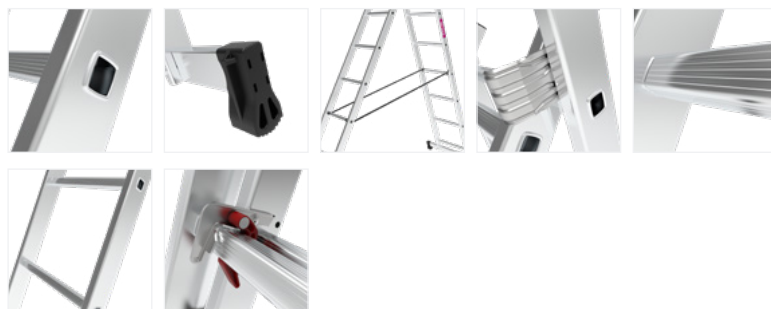

All rights reserved, non-contractual images.



STARLINE TWO-SECTION COMBINATION LADDER

Reference														
		(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(mm)	(kg)	
00142707	2x7	2.01	3.13	1.84	2.87	2.14	4.03	0.11	0.39	0.71	1.55	53 / 53	6	3178740265274
00142708	2x8	2.29	3.41	2.1	3.15	2.14	4.31	0.11	0.39	0.71	1.78	53 / 53	6.8	3178740265281
00142709	2x9	2.57	3.97	2.39	3.43	2.14	4.87	0.13	0.39	0.81	1.81	61 / 61	8.2	3178740265298
00142711	2x11	3.13	5.09	2.95	4.01	2.14	5.99	0.15	0.39	0.91	2.03	78 / 78	11.6	3178740265304

													
Number of rungs / steps	Folded product height (m)	Max. height of deployed product (m)	Max. overall product height (m)	Aerial access height (m)	Min. access height (m)	Max. access height (m)	Thickness of folded product (m)	Product width at base (m)	Product width with stabiliser bar (m)	Base width (m)	Upright section (mm)	Weight (kg)	Barcode