


STARLINE THREE-SECTION COMBINATION LADDER

The Starline aluminium three-section combination ladder features an added stabiliser bar, steel joints and a retaining strap, guaranteeing ease-of-use and stability.

Class	Household
Use frequency	Regular
Use	Flat surface
Main material	Aluminium
Maximum load (kg)	150
Guarantee (year)	3
Standard	EN 131
Decree	96-333
Recyclable up to (%)	93

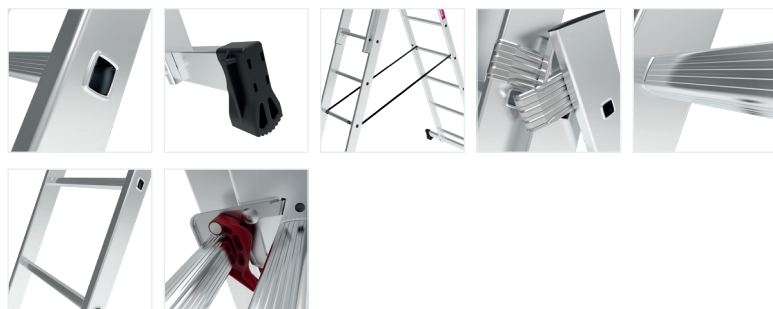

STARLINE THREE-SECTION COMBINATION LADDER

Reference														
00143707	3x7	2.01	3.97	2.64	2.16	3.73	4.87	0.16	0.45	0.81	1.49	53 / 61 / 53	9.4	3178740265311
00143708	3x8	2.29	4.81	3.22	2.16	4.29	5.71	0.17	0.45	0.81	1.55	53 / 78 / 53	11.2	3178740265328
00143709	3x9	2.57	5.65	3.75	2.16	4.85	6.55	0.18	0.45	0.91	1.74	61 / 78 / 61	13.4	3178740265335
00143711	3x11	3.13	6.49	4.8	2.16	5.97	7.39	0.21	0.45	1.01	2.17	78 / 78 / 78	17.8	3178740265342

													
Number of rungs / steps	Folded product height (m)	Max height of deployed product (m)	Product aerial height (m)	Min. access height (m)	Aerial access height (m)	Max access height (m)	Thickness of folded product (m)	Product width at base (m)	Product width with stabiliser bar (m)	Base width (m)	Upright section (mm)	Weight (kg)	Barcode