
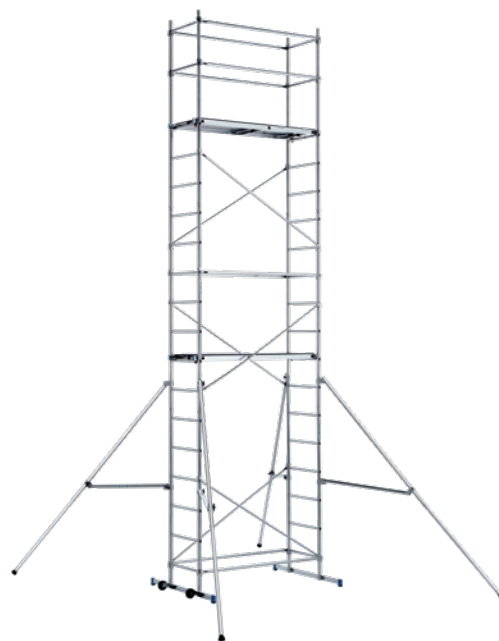


FIRST 7

ALL THE FEATURES OF THE LARGER MODELS

The First aluminium scaffold tower is designed for occasional use. It is easy to handle and safe.

Class	Household
Use frequency	Moderate
Use	Flat surface / Uneven surface
Material	Aluminium
Maximum load (kg/m ²)	150
Guarantee (year)	2
Standard	NF E 85-200
Comfort level	2

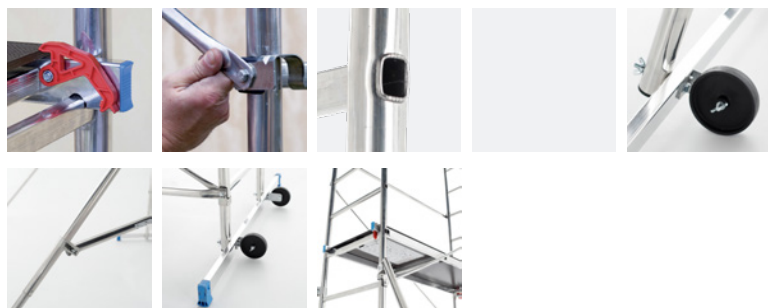

Model shown: 02400907

- The FIRST range is quick to assemble and install
- No tools or screws needed
- For occasional use and compliant with the standard governing products for household use
- Movement is facilitated by two Ø100 mm castor wheels attached to one of the two stabiliser bars
- Platform lock Locking of cross-braces and braces with a quarter turn system
- Ø40 mm uprights and 30 x 22 mm rungs
- Can be used with level offset
- Offset base for better stability



FIRST 7

Reference	Nb of platform	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (m)	 (kg)	
02400907 	2	5.91	1.21	3.27	4.22	2.27	0.41	0.61	0.3	4.83	2.3	6.83	52.7	3178740095086

Model delivered in two packages

 Reference on request

 Max. overall product height (m)	 Product width without stabili- sers (m)	 Overall length with stabilisers (m)	 Overall width with stabilisers (m)	 Folded height (m)	 Folded width (m)	 Folded length (m)	 Min. platform height (m)	 Max. platform height (m)	 Min. working height (m)	 Max. working height (m)	 Weight (kg)	 Barcode
---	--	--	---	---	--	---	--	---	---	---	--	--