

CROSS 180

PROFESSIONAL QUALITY AT THE BEST PRICE

The Cross range is designed for intensive use with a usable platform surface area of 170 x 65 cm which offers good working comfort.

Class	Professional
Use frequency	Intensive
Use	Flat surface / Level offset / Uneven surface
Material	Aluminium
Maximum load (kg/m ²)	200
Guarantee (year)	5
Standard	EN 1004-1
Standard requirements	Recommendation R 457
Decree	2004-924
Recyclable up to [%]	87



Access cradle for greater safety



Braces guardrails



Platform (inside)
170 x 0.65m



Ergoblock® single
movement locking
system




Wheels Ø 200mm
adjustable up
to 175mm up to
12.5mm increments



The braces and
midbraces fit easily
into place with the
T-Grip pole




Ergonomic hooks
to facilitate
platform
installation

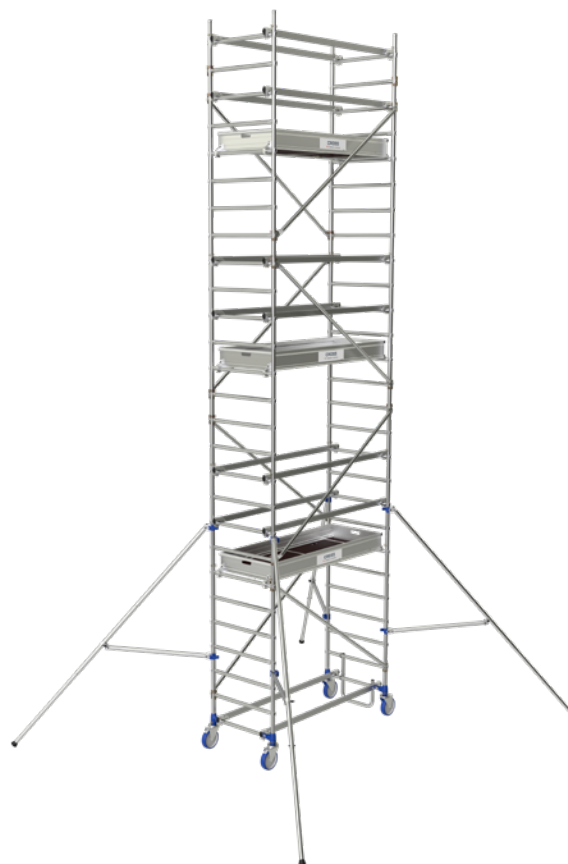

Model shown: 26404660

- The platform with integrated toeboard is appreciated by safety organisations (it guarantees safety and quick assembly)
- The ends of the braces and midbraces have ribbed jaws which automatically snap into place when the system is installed (they provide a highly reliable anti-fall connection)
- The braces are easily positioned and removed with the T-Grip pole
- Each wheel can be individually adjusted in height up to 175mm in pre-programmed increments of 12.5mm
- The wheels are equipped with a bi-directional brake system that guarantees perfect stability during use

- Thanks to the Ergoblock® system, the stabilisers are easy to put in place and their tightness is controlled



NF certified product: Certifying body: AFNOR Certification, 11, rue Francis de Pressensé, F-93571 La Plaine Saint Denis Cedex (FR). Certification framework: Construction site equipment NF (NF096) available at www.marque-nf.com. The NF mark certifies compliance with the EN 1004-1 standard and with the NF096 framework. All rights reserved, non-contractual images.

CROSS 180

Reference	Nb of platform		(m)		(m)		(m)		(m)		(m)		(m)		(kg)	Wide-base ladder 0.78 m 20403010 Assembly pole rail 20400090 Secure brace L 1.80 m 20400032 1 unit wheel foot kit 20400006 Tray floor cross 2 180mx0.67m 02004905 Access cradle 02900010 Cross-brace L 2.193 m 20400042 Totem stabiliser 20400021 Extension 1m W 0m80 20403011 Extension 2m W 0m780 20403013 Stabilisers 7.8 m 20400023										
26404620	1	3	2.11	0,9	4,5	3,8	1,85	3.85	76	2	1	6	4	1	1	2	4	2	0	0	3178740233716					
26404630	1	4	2.11	0,9	4,5	3,8	2,85	4.85	78,1	2	1	6	4	1	1	4	4	2	1	0	3178740233723					
26404640	2	5	2.11	0,9	4,5	3,8	3,85	5.85	108,4	2	1	10	4	2	1	6	4	2	2	0	3178740233730					
26404650	2	6	2.11	0,9	4,5	3,8	4,85	6.85	113,8	1	1	10	4	2	1	6	4	2	3	0	3178740233747					
26404660	3	7	2.11	0,9	4,5	3,8	5,85	7.85	144,1	2	1	14	4	3	1	8	4	2	4	0	3178740233754					
26404670	3	8	2.11	0,9	5	5,3	6,85	8.85	159,6	2	1	14	4	3	1	8	4	2	5	4	3178740233761					
26404680	4	9	2.11	0,9	5	5,3	7,85	9.85	189,9	2	1	18	4	4	1	10	4	2	6	4	3178740233778					
09074000	Tool holder														0,2	0	0	0	0	0	0	0	0	0	0	8711563239692

 Max. overall product height (m)
  Overall length without stabilisers (m)
  Product width without stabilisers (m)
  Overall length with stabilisers (m)
  Overall width with stabilisers (m)
  Max. platform height (m)
  Max. working height (m)
  Weight (kg)
  Barcode